
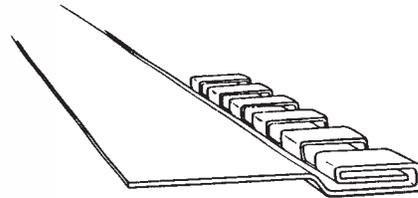


Connector Plus™ Flexible Duct Connector

Commercial/Industrial Quality 3"-3"-3" 24G



Double Fold Offset Seam

Connector Plus Flexible Duct Connector is the premium Heavy Duty manufactured flexible duct connector, offering quality unmatched by others. Made for industrial and commercial applications, Connector Plus is available in a variety of special fabrics and is made with prime G-90 galvanized steel, aluminum or 316 Stainless Steel. The continuous 100' rolls readily dispense from a bench-high carton. Connector Plus excels in isolating vibrations produced by air handling units, fans, blowers and other HVAC equipment.

PART NUMBER	PRODUCT DESCRIPTION	QTY.	FABRIC REFERENCE
307839	CONN CML NEO CLS BLK 3-3-3 24G (CPN-4-50)	50 ft./box	NEOPRENE
307838	CONN CML NEO CLS BLK 3-3-3 24G (CPN-4-100)	100 ft./box	NEOPRENE
307832	CONN CML HYP CLS WHT 3-3-3 24G (CPH-4-50)	50 ft./box	HYPALON
307831	CONN CML HYP CLS WHT 3-3-3 24G (CPH-4-100)	100 ft./box	HYPALON
307846	CONN CML SIL CLS GRY 3-3-3 24G (CPS-4-50)	50 ft./box	SILICONE HI-T
307843	CONN CML SIL CLS GRY 3-3-3 24G (CPS-4-100)	100 ft./box	SILICONE HI-T
307850	CONN CML VNLFLX CLS YELLOW 3-3-3 24G (CPV-4-50)	50 ft./box	VINYLFLEX
307849	CONN CML VNLFLX CLS YELLOW 3-3-3 24G (CPV-4-100)	100 ft./box	VINYLFLEX
308871	CONN CML NEO STAINLESS 3-3-3 24G (CPN-SS-50)	50 ft./box	NEOPRENE
308873	CONN CML HYP STAINLESS 3-3-3 24G (CPH-SS-50)	50 ft./box	HYPALON
319085	CONN CMLNEO CLS BLK 3-3-3 ALUM 50' (CPN-ALU-50)	50 ft./box	NEOPRENE

FEATURES AND BENEFITS

- Made with G-90 galvanized steel (thicker galvanized coated steel for extended product life), aluminum or 316 stainless steel
- Double Fold Offset Seams™ are carefully pressure controlled during manufacturing
- The Offset Seam acts as a structural stabilizer, adding rigidity while eliminating the need for added 90 bends used in some shops
- Offset Seams protect fabrics during folding/rolling, adds structural stiffness, yet cuts and works easily and is precisely perforated
- Offers superior holding power and tear resistance
- 3" – 3" – 3" configuration
- Provides the correct fabric and metal gauge for every application

AVAILABLE IN THE FOLLOWING FABRICS

- NEOPRENE
- HYPALON
- SILICONE HI-T
- VINYLFLEX

SPECIFICATION/STANDARDS COMPLIANCE

Property	Method	Results
Surface Burning Characteristics of Building Materials	ASTM-E84	Pass
	Los Angeles Approval RR# 8434	Pass